



Item #: \_\_\_\_\_

Models: H284/H287

Product Name: 60" Starfire Series  
Medium Duty Gas Range



Model # H284

### H284 Double Oven Model & H287 Single Oven & Storage Base Model Specifications:

Gas medium duty range with full size porcelain interior oven(s) , 60" (1524mm) wide. (10) open top Starfire burners with cast iron top and ring grates. Stainless steel front rail and valve panel. Stainless steel oven doors and center column with black sides and front trim. Stainless steel backboard and plate shelf. Available with optional hot top(s) and/or griddle. H287 has storage base on right. Recommended for churches, schools, cafes, and small restaurants.



### Standard Features:

- Cast iron top and ring grates
- 24,000 BTU / 7.03kW, (Natural Gas) or 20,000 BTU / 5.86kW, (Propane) Starfire burners, (10)
- Stainless steel front & two sides
- Stainless steel valve panel
- Stainless steel front rail
- Stainless steel two piece easy to assemble backguard and plate shelf
- 30,000 BTU (8.79kw) oven burner
- Standard oven(s); fully porcelain interior which includes oven bottom, top, rear, embossed sides, and inside door liner.
- Storage base in lieu of one oven; Model H287
- Removable nickel plated four position oven rack guides
- Nickel plated oven rack (one per oven)
- Heavy-duty "FDO" oven thermostat (150°-500°F, 66°-260°C range)
- 6" (152mm) chrome steel legs with stainless steel inserts
- Gas pressure regulator
- One year limited warranty on parts & labor, (USA & Canada only)

### Optional Features:

- Black porcelain top and ring grates (change "H" in model number to "P"), no charge
- Stainless steel backguard/flue riser "BG", no charge
- 10" (25mm) Lo-profile backguard, change "BG" to "LPBG", no charge
- Celsius temperature dials, no charge
- Convection oven base: for (1) CO base, add suffix RC; for (2) CO bases, add suffix RC2
- 12" (305mm) hot top section; 3/8" (10mm) thick (Add Suffix -1, -2, -3, -4, or -5); standard on left or specify location
- 12" 24", 36", 48" or 60" griddle; 5/8" (16mm) thick; (manual or thermostat control); 5/8" (19mm) thick, working depth 20-1/2" (521mm); standard on right or specify location
- Additional oven rack
- Stainless steel legs, set of (4)
- Set of (4) casters with front (2) locking

NOTE: Ranges supplied with casters must be installed with an approved restraining device.

<http://www.Garland-Group.com>

**Garland Commercial Industries, Inc.**  
185 East South Street  
Freeland, Pennsylvania 18224  
Phone: (570) 636-1000  
Fax: (570) 636-3903

**Garland Commercial Ranges Ltd**  
1177 Kamato Road, Mississauga, Ontario  
L4W 1X4 CANADA  
Phone: 905-624-0260  
Fax: 905-624-5669

**Enodis UK LTD**  
Swallowfield Way, Hayes, Middlesex  
UB3 1DQ ENGLAND  
Telephone: 081-561-0433  
Fax: 081-848-0041



Item #: \_\_\_\_\_  
 Models: H284/H287  
 Product Name: 60" Starfire Series  
 Medium Duty Gas Range

Input Rating Per Burner (Natural Gas) †								Operating Pressure			
Open*		Hot Top**		Griddle***		Oven		Natural		Propane	
BTU	kW	BTU	kW	BTU	kW	BTU	kW	"WC	mbar	"WC	mbar
24,000	7.03	18,000	5.27	18,000	5.27	30,000	8.78	4.5	11.25	10	25

Gas input ratings shown for installations up to 2000 ft., (610m), above sea level. Please specify altitudes over 2000 ft.

† All propane and natural gas BTU ratings are the same except for open burners (rated at 20,000BTU/5.86kW with Propane) Please specify gas type when ordering.

\* Two (2) burners per 12"(305mm) section,

\*\* One (1) burner per optional 12"(305mm) section, (replaces 2 open burners); add suffix: -1, -2,-3,-4,or -5; standard on left

\*\*\* One (1) burner per 12"(305mm) of optional griddle width, (replaces 2 open burners); add suffix: -12G, -24G,-36G,-48G or -60G, (valve control)/-12TH, -24TH,-36TH,-48TH or -60TH), (thermostat control); standard on right


Exterior Dimensions			Oven Interior Dimensions			Installation Clearances	
Height w/shelf	Width	Depth	Height	Width	Depth	Sides	Rear
59-1/2" (1511mm)	60" (1524mm)	33" (838mm)	13-1/2" (343mm)	26-1/4" (667mm)	22" (559mm)	6" (152mm)	6" (152mm)

NOTE: Installation clearance reductions are applicable only where local codes permit.

This product is not approved for residential use.

Model	Shipping Wt*		Entry Clearances	
	Lbs.	Kg	Crated	Uncrated
STD	860	391	46" (1168mm)	34" (864mm)
RC	910	414	46" (1168mm)	39" (991mm)

\*Less 150 Lb/69 Kg for Model H287 STD and RC

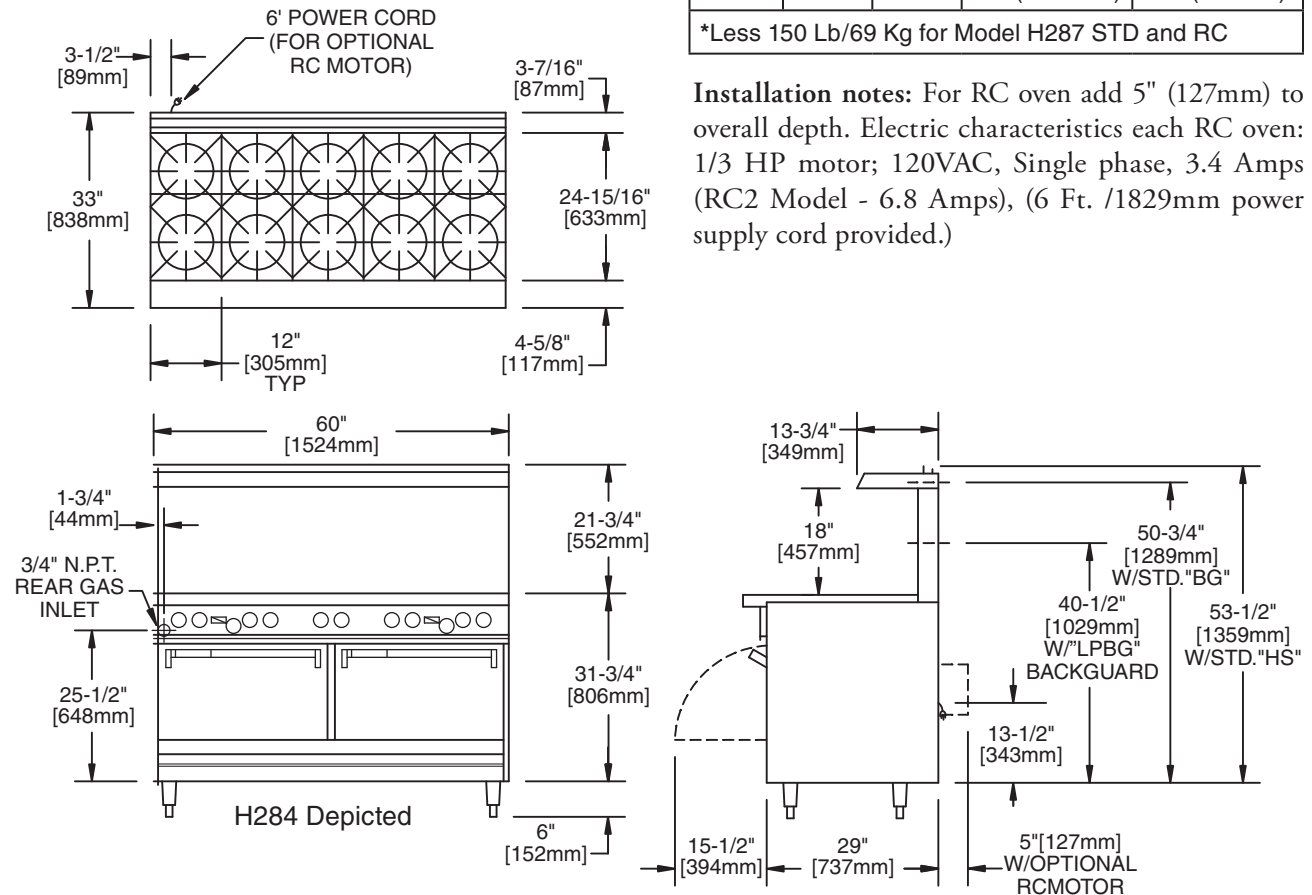

**Installation notes:** For RC oven add 5" (127mm) to overall depth. Electric characteristics each RC oven: 1/3 HP motor; 120VAC, Single phase, 3.4 Amps (RC2 Model - 6.8 Amps), (6 Ft. /1829mm power supply cord provided.)

Continuous product improvement is a Garland policy. Specifications and design are subject to change without notice.