



Model GD-24RB

Specification:

Gas designer series broilers in four widths; models GD-18RB 18" (460mm) wide GD-24RB 24" (610mm) wide GD-30RB 30" (760mm wide) and GD-36RB 36" (914mm) wide. Designed as free standing or to be banked with other GD series equipment. 24" (610mm) deep x 15" (381mm) high, easy clean design with stainless steel front and black painted sides, cast iron radiants, and optional broiler splatter shield. Hi-Lo valve controlled, piezo spark ignition, natural or propane gas, 45,000, 60,000, 75,000 and 90,000 BTU.

Standard Features:

- Stainless steel front and black painted sides
- 4" (102mm) Sanitary legs
- Easy clean design
- 18" (457mm) deep cooking surface
- Cast iron radiants
- Piezo spark ignition
- Hi-Lo control valve
- Rear gas connection w/pressure regulator
- Natural or propane gas
- 45,000, 60,000, 75,000 or 90,000 BTU total input

Optional Features:

- Stainless steel sides
- Stainless steel back and bottom
- Broiler splatter shield, 18" (460mm) to 36" (914mm) wide, example order 18B for GD-18RB broiler.
- "CE" approved models have Flame Failure protection. When ordering this option please add the suffix "FF" to the model number i.e. GD-18RBF

Optional CSD Series Stands:

- Floor Stands: Heavy-duty stands of open design with seamless welded square tube leg and black finish storage shelf. Working height of all units on stands 35-1/2" (902mm). Stand widths available in 18" (457mm), 24" (610mm), 30" (762mm), and 36" (914mm). Each unit must have its own stand. Example for GD-36RB broiler, specify compatible CSD-36 stand.
 - Optional: Stainless steel finish
 - Swivel casters W/front brakes; set of 4



Garland Commercial Industries, Inc.
 185 East South Street
 Freeland, Pennsylvania 18224
 Phone: (570) 636-1000
 Fax: (570) 636-3903

Garland Commercial Ranges Ltd
 1177 Kamato Road, Mississauga, Ontario
 L4W 1X4 CANADA
 Phone: 905-624-0260
 Fax: 905-624-5669

Enodis UK LTD
 Swallowfield Way, Hayes, Middlesex
 UB3 1DQ ENGLAND
 Telephone: 081-561-0433
 Fax: 081-848-0041


MODEL	Overall Dimensions			Total Input BTU/Kw	Shipping Wt Lb/kg
	Width	Height	Depth		
GD-18RB	18" (460mm)	15" (381mm)	24" (610mm)	45,000/13.19	110/50
GD-24RB	24" (610mm)	15" (381mm)	24" (610mm)	60,000/17.58	150/88
GD-30RB	30" (760mm)	15" (381mm)	24" (610mm)	75,000/21.98	200/91
GD-36RB	36" (914mm)	15" (381mm)	24" (610mm)	90,000/26.37	240/109

Gas Input ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Non Combustible Installation only		Floor or Base
Sides	Back	
0"	0"	Non Combustible

Manifold Inlet Size NPT	Manifold Operating Pressure			
	Natural		Propane	
	"WC	mbar	"WC	mbar
3/4"	4	10	10	24.9

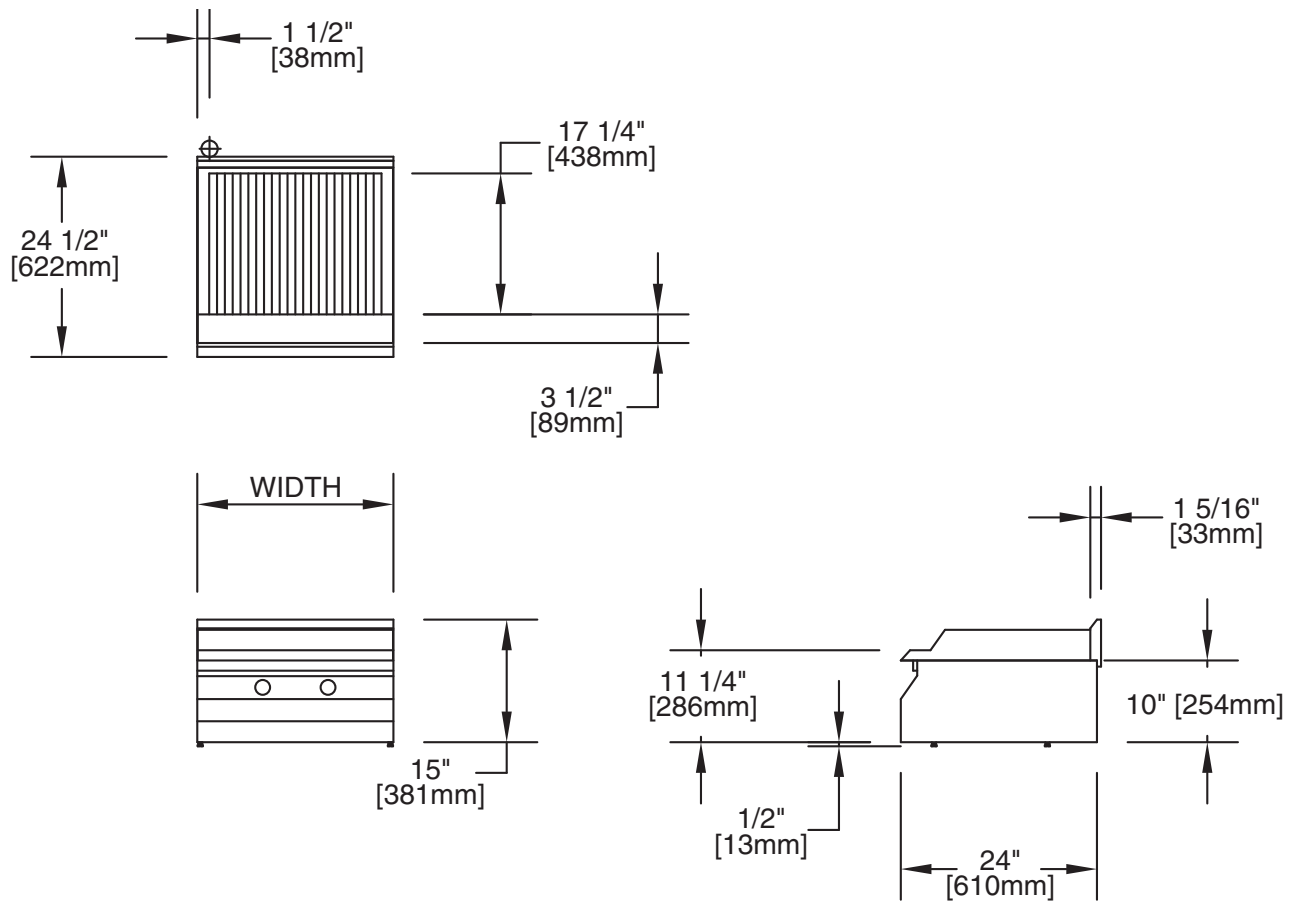

Continuous product improvement is a Garland policy. Specifications and design are subject to change without notice.